


HSF RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

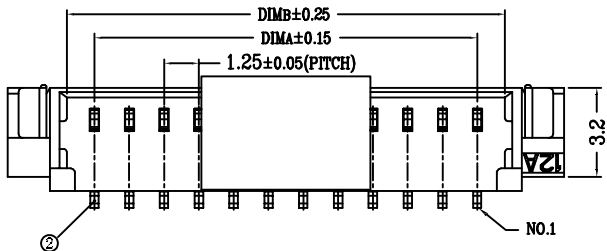



Ordering Information

L102XX - 1 2 4 0 XX D



Pin Per Row: 1, 2, 4, 0
 Row Option: 1=Single Row
 Welding Method: 2=Vertical SMT type
 Insulation Material Option: 4=LCP, 8=NY9T
 Serial NO. 01-99
 Packing: D=Reel
 Special form: 0=Ordinary

Note:

- Material
 - Housing: LCP UL94V-0 Color:Nature.
 - Contact: Phosphor Bronze.
 - LEG: Phosphor Bronze.
- Plating
 - Contact: Tin.
 - LEG: Tin
- Rating:
 - Operating Voltage: 125V AC/DC.
 - Current Rating: 1A AC/DC.
 - Operating Temperature: -25°C~+85°C.
 - Contact Resistance: 30 mΩ max.
 - Insulation Resistance: 100 MΩ min.
 - Dielectric withstanding Voltage: AC 250V
 - Applicable Wire: AWG#24~#30
- Part Number:

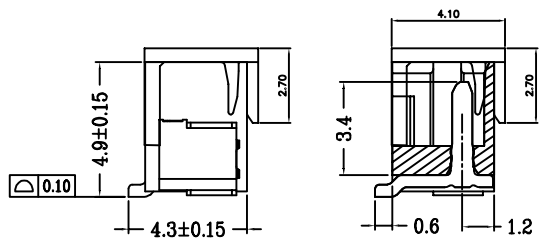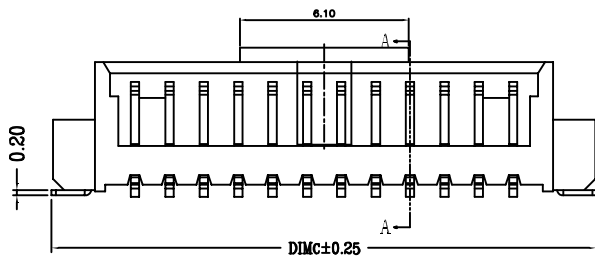


SECTION A-A

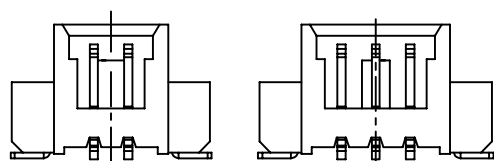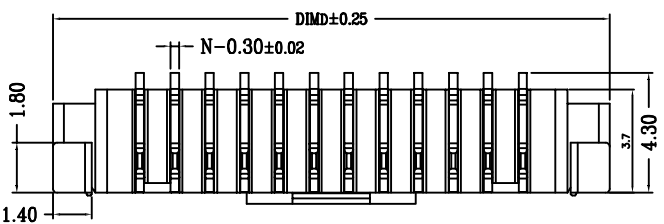

2 PIN 3 PIN

LOCK CONFIGURATION 鎖扣位置

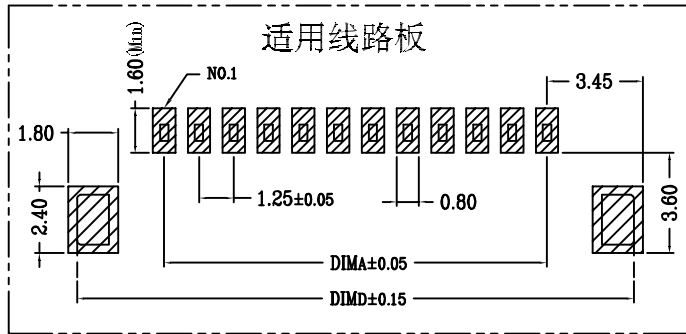

LDCONN 东莞连大精密制品有限公司

連大 DongGuan LianDa Precision Products Co., LTD

TITLE	PHI. 25mm, Single row, Vertical SMT type	DRAWN BY	WZG	17. 03. 30
PART NO	L102XX-1240XXD	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°