



HSF RoHS



REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

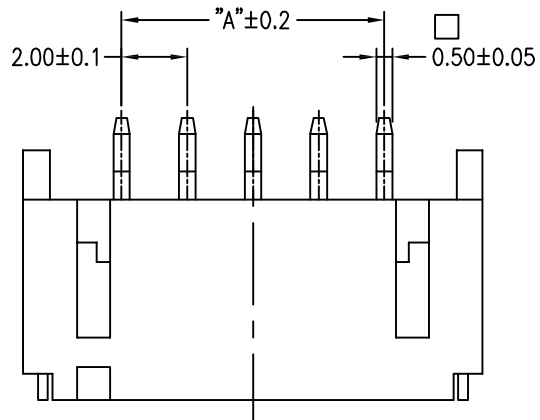

Note:

1. Material
 - 1.1: Housing: LCP UL94V-0 Color:Nature.
 - 1.2: Contact: Brass.
 - 1.3: LEG: Phosphor Bronze.
2. Plating
 - 2.1: Contact: Tin.
 - 2.2: LEG: Tin
3. Rating:
 - 3.1: Operating Voltage: 125V AC/DC.
 - 3.2: Current Rating: 2A AC/DC.
 - 3.3: Operating Temperature: -25°C~+85°C.
 - 3.4: Contact Resistance: 30 mΩ max.
 - 3.5: Insulation Resistance: 1000 MΩ min.
 - 3.6: Dielectric withstanding Voltage: AC 500V
 - 3.7: Applicable Wire: AWG#24~#30
4. Part Number:

Poles	DIM.A	DIM.B
2A	2.0	8.0
3A	4.0	10.0
4A	6.0	12.0
5A	8.0	14.0
6A	10.0	16.0
7A	12.0	18.0
8A	14.0	20.0
9A	16.0	22.0
10A	18.0	24.0
11A	20.0	26.0
12A	22.0	28.0
13A	24.0	30.0
14A	26.0	32.0
15A	28.0	34.0
16A	30.0	36.0
17A	32.0	38.0
18A	34.0	40.0
19A	36.0	42.0
20A	38.0	44.0

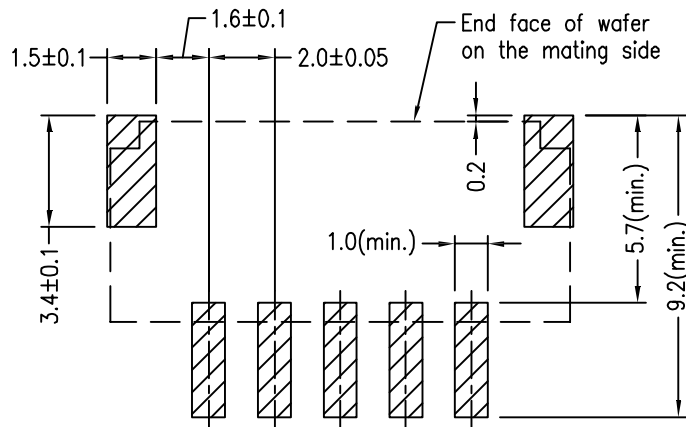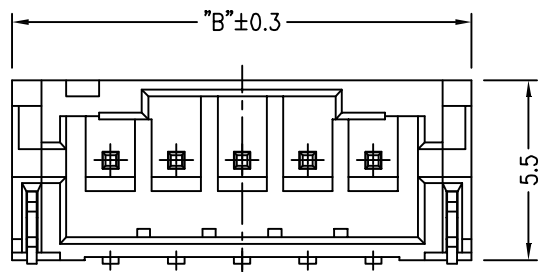

Ordering Information

L104XX - 1 3 8 0 XX D

Pin Per Row — 1 — 3 — 8 — 0 — XX — D

Row Option
1=Single Row

Insulation Material
Option:
8=NY9T

Welding Method
3=Horizontal SMT type

Serial NO.
01-99

Packing
D=Reel

Special form
0=Ordinary

P.C.B LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

LDCONN 东莞连大精密制品有限公司
 星大 DongGuan LianDa Precision Products Co., LTD

TITLE	PH2.0mm Wafer Single row, Horizontal SMT type	DRAWN BY	WZG	17.03.30
PART NO	L104XX-1380XXD	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4