


# HSF RoHS


REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

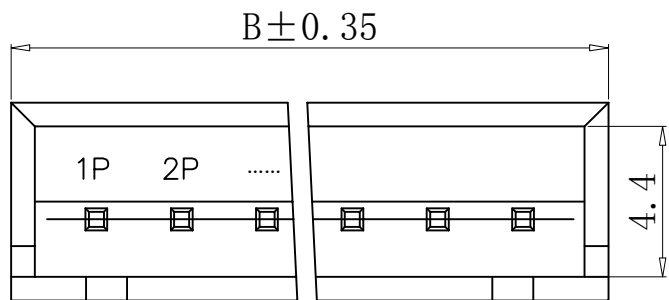



**Note:**

1. Material
  - 1.1: Housing: NY66, Color: Nature
  - 1.2: Contact: Brass, Tin.
2. Rating:
  - 2.1: Operating Voltage: 250V AC/DC.
  - 2.2: Current Rating: 3A AC/DC.
  - 2.3: Operating Temperature: -25°C ~ +85°C.
  - 2.4: Contact Resistance: 30 mΩ max.
  - 2.5: Insulation Resistance: 1000 MΩ min.
  - 2.6: Dielectric withstanding Voltage: AC 500V
  - 2.7: Applicable Wire: AWG#24~#30
3. Part Number:

PART NO	Dimensions	
	A	B
2P	2.5	7.5
3P	5.0	10.0
4P	7.5	12.5
5P	10.0	15.0
6P	12.5	17.5
7P	15.0	20.0
8P	17.5	22.5
9P	20.0	25.0
10P	22.5	27.5
11P	25.0	30.0
12P	27.5	32.5
13P	30.0	35.0
14P	32.5	37.5
15P	35.0	40.0
16P	37.5	42.5

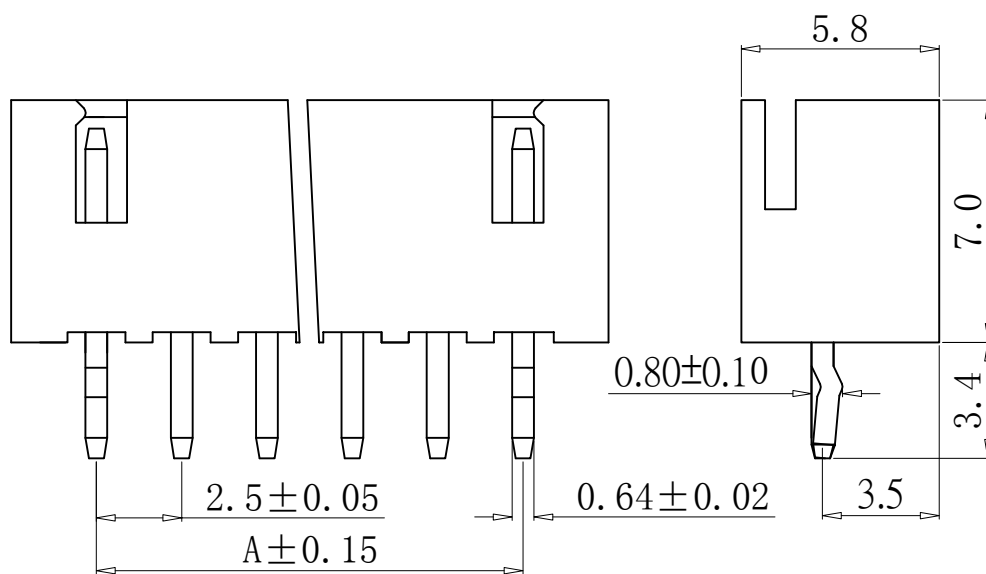

## Ordering Information

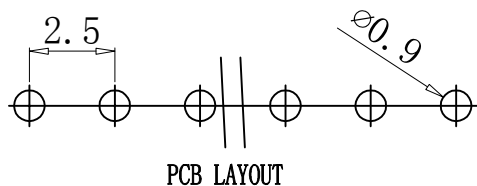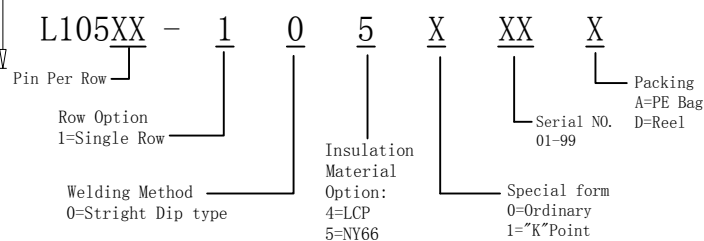

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

**LDCONN 东莞连大精密制品有限公司**  
 连大 DongGuan LianDa Precision Products Co., LTD

TITLE	PH2.5mm Wafer Single row, Stright Dip type	DRAWN BY	WZG	17.03.30
PART NO	L105XX-105XXXX	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4