

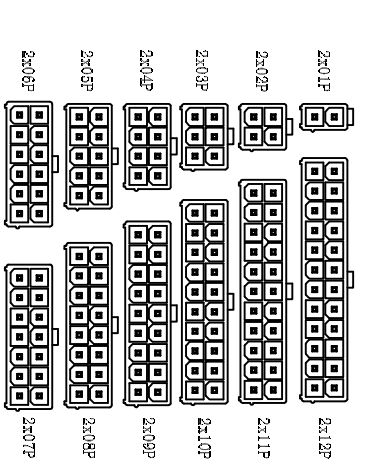
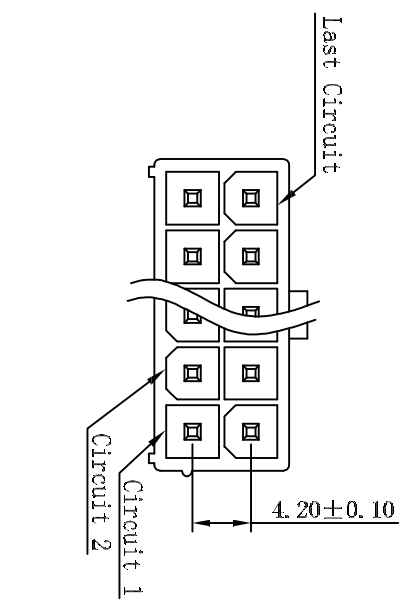
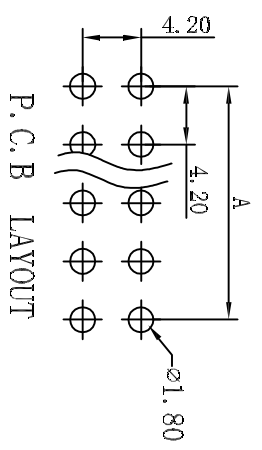


HSE ROHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

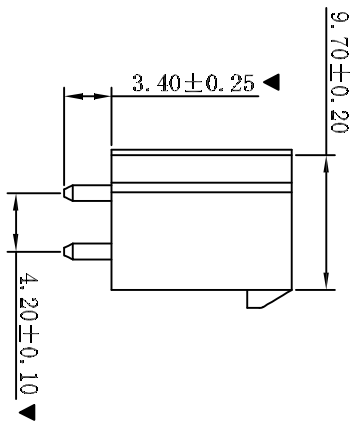


CIRCUIT SIZE LAYOUT

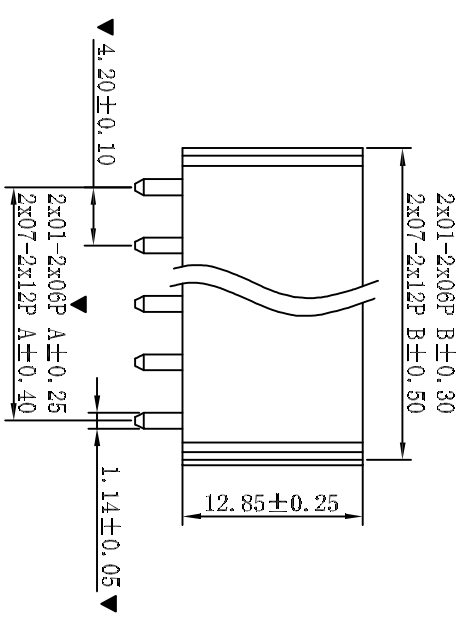

- Note:
- Material
 - Housing: NY66, Color:White
 - Contact: Brass, Tin.
 - Rating:
 - Operating Voltage: 250V AC/DC.
 - Current Rating: 9A AC/DC.
 - Operating Temperature: -25°C~+85°C.
 - Contact Resistance: 30 mΩ max.
 - Insulation Resistance: 1000 MΩ min.
 - Dielectric withstanding Voltage: AC 1500V

3.Pater Number:

Ordering Information

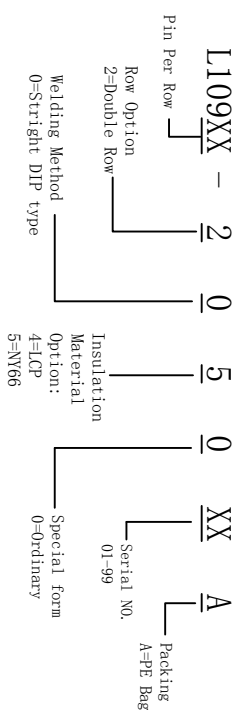

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

LDCONN 东莞连大精密制品有限公司		Dongguan LianDa Precision Products Co., LTD	
TITLE	PH: 2mm Wafer Double row, DIP Stright type	DRAWN BY	WZG
PART NO	L109XX-2050XXA	CHECKED BY	
DRAWING NO		APPROVED BY	
SCALE	1:1	UNIT	mm
		PAGE	1/1
		SIZE	A4