REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

HSF RoHS

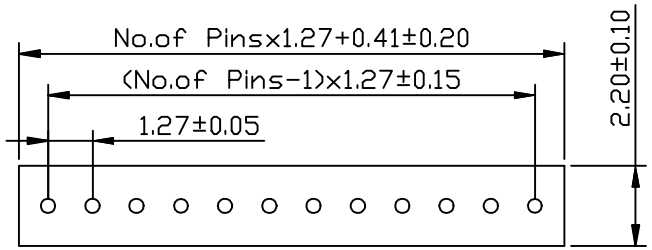

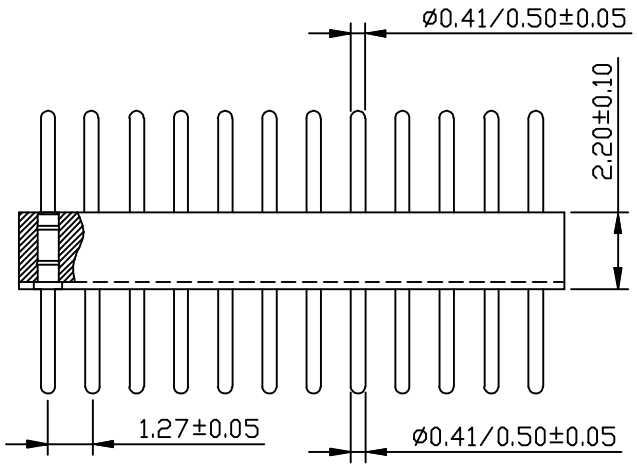

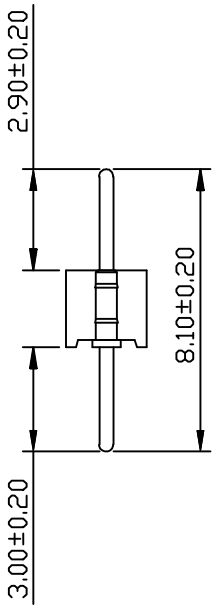

Technical Specs:

Insulator:	Black glass filled polyester PPS-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass CuZn36Pb3(C36000)
Accepted pin:	Ø0.41 mm
Mechanical life:	min500 cycles
Rated current:	1A
Dielectric resistance:	Min 1000V RMS
Coplanarity SMD terminations:	max 0.1 mm(measured on 25 mm long connectors)

Ordering Information

L489XX - X X XX X

- NO. of Pins Per Row: 01-40P
- The connection method: 0=180° 1=90° 2=SMT
- Contact Plating: 1=Gold flash 2=Au/Tin
- Serial NO. 01-99
- Packing: A=PE Bag B=Tube C=Tray D=Reel

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

LDCONN 东莞连大精密制品有限公司
连 大
DongGuan LianDa Precision Products Co., LTD

TITLE	PH1.27mm-L Machined Male Header H=2.2 Single row 180° Type		DRAWN BY	Lujunhui	18.11.12		
PART NO	L489XX-0XXXX		CHECKED BY				
DRAWING NO			APPROVED BY				
SCALE	1:1	UNIT	mm	PAGE	1/1	SIZE	A4