

HSF ROHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

TECHNICAL DATE

Insulator-PPS UL94V-0
 Electrical
 Insulation resistance: $\geq 1000M\Omega V=100V$
 Mechanical
 Operating temperature(continuous):-65°C-+125°C
 Soldering temperature:+260°C,10s max

Ordering Information

L489XX - X X XX X


NO. of Pins
 Per Row:
 01-40P

The connection method
 0=180°
 1=90°
 2=SMT

Contact Plating
 1=Gold Flash
 2=Au/Tin

Serial NO.
 01-99

Packing
 A=PE Bag
 B=Tube
 C=Tray
 D=Reel

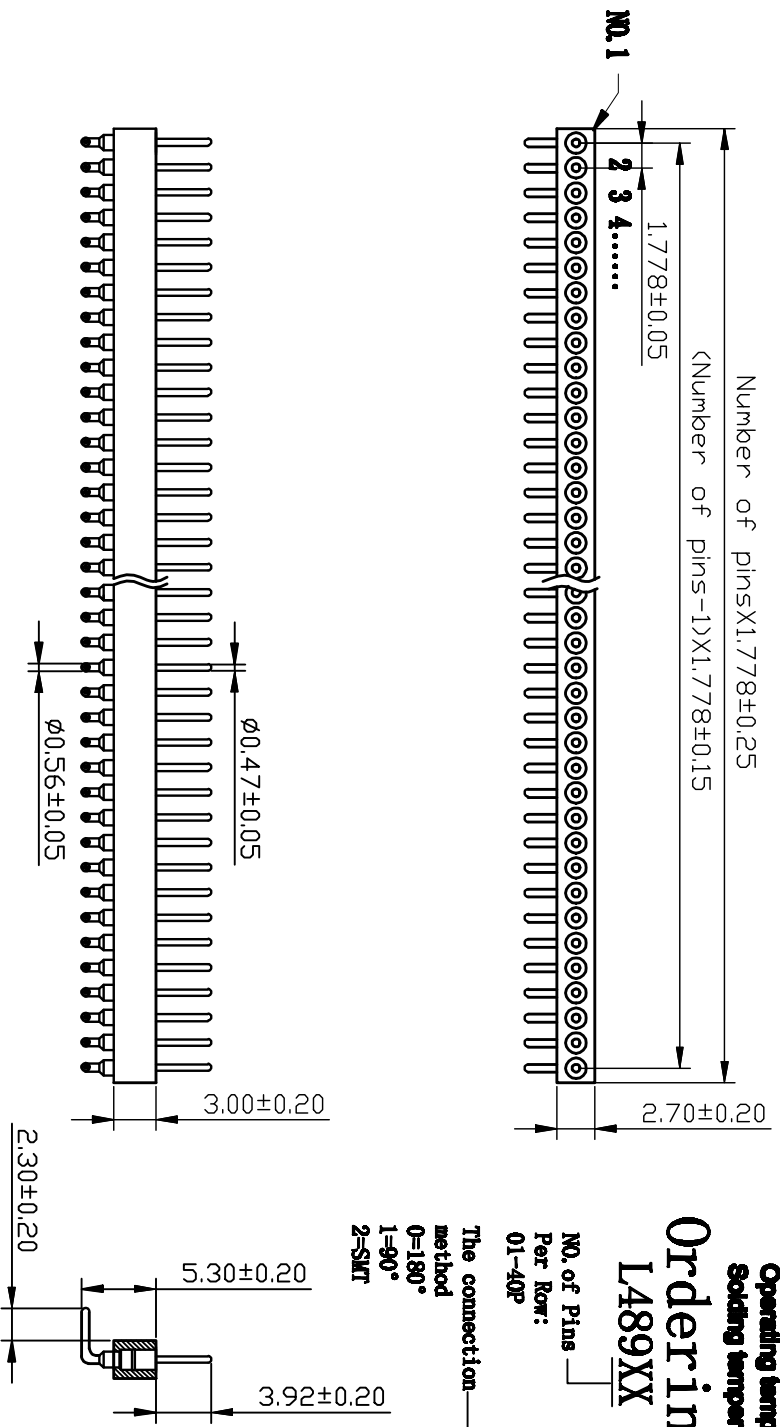

LDCONN 东莞连大精密制品有限公司 Dongguan Lianda Precision Products Co., LTD		TITLE Part No. L489XX-1XXXX DRAWN BY Lu Junhui CHECKED BY APPROVED BY		DATE 18.11.12 SIZE A4	
STANDARD TOLERANCE (EXCEPT SPECIFIED) LINNER ANGLES 0 ±0.30 0.° ±3° .00 ±0.20 .0° ±2° .000 ±0.10 .00° ±1°		PART NO L489XX-1XXXX DRAWING NO SCALE 1:1 UNIT mm PAGE 1/1 SIZE A4		TITLE Male Header B=4.0 Single row 90° Type DRAWN BY Lu Junhui CHECKED BY APPROVED BY	