



REV	ECN NO	DESCRIPTION	DATE	NAME
A	---	NEW	02/12-'22	Frank

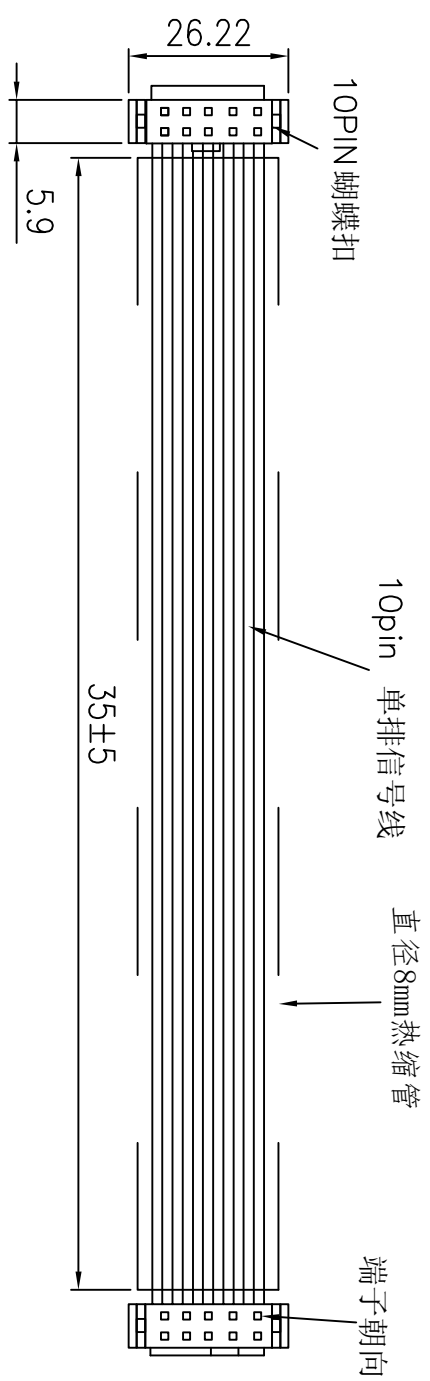

- 技术要求:**
1. 接触良好 接触阻抗 $\leq 150m\Omega$
  2. 产品固定和压钳牢靠
  3. 导线规格: 28AWG 300V 105°C, 表皮不能破损
  4. 耐压1000V, 1min不击穿
  5. 耐燃性符合UL VW-1和CSA FT1标准
  6. 拉力 $\geq 100N$

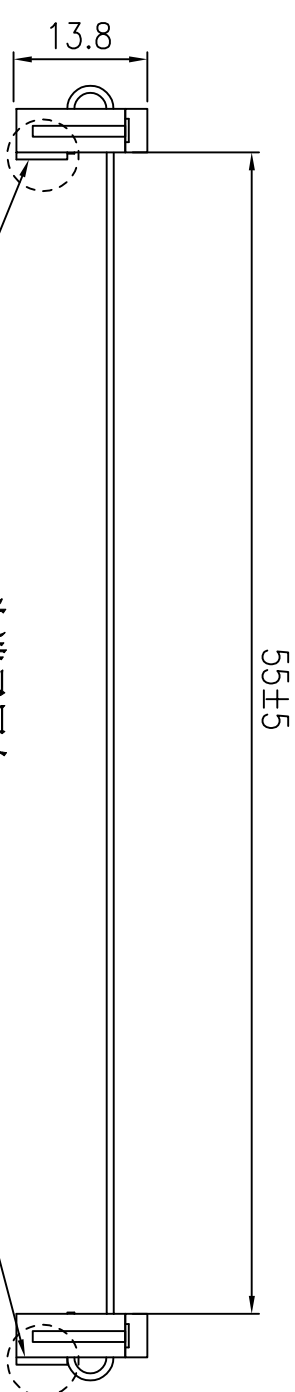

### Ordering Information

LCB XX XX XX XX XXXX

Code	FC: FPC	PH: PIN HEADER (总PIN数)	WF: WAFER	CB: CABLE	NA: 针对两端只上锡无接插件	HS: Housing	TE: Terminal	AC: AC SOCKET
Code	FC: FPC	PH: PIN HEADER (总PIN数)	WF: WAFER	CB: CABLE	NA: 针对两端只上锡无接插件	HS: Housing	TE: Terminal	AC: AC SOCKET
头部PIN数	1 99	尾部PIN数	1 99	Serial No	0001 9999			

序号	类型	料号	型号/规格	用量	单位
3	接头		IDC 2X5P连接器	2	PCS
2	套管		Ø8.0MM黑色热缩套管	35	MM
1	排线		普通10芯排线	85	MM

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
0 ±0.30	0° ±3°
.00 ±0.20	0° ±2°
.000 ±0.10	.00° ±1°

**LD CONN 东莞连大精密制品有限公司**  
 DongGuan LianDa Precision Products Co., LTD

TITLE	IDC2.54 2*5P TO IDC 2.54 2*5P 普	DRAWN BY	Frank
PART NO.	LCBHS05HS050003	CHECKED BY	
DRAWING NO.		APPROVED BY	
SCALE	1:1	UNIT	mm
		PAGE	1/1
		SIZE	A4