

HSF RoHS 非正式图纸, 仅供参考





REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	09/19-'23	KJL

规范

Specifications

1. 额定电流:3.0安培
Current Rating: 3.0Amps
2. 额定电压:250V AC/DC
rated voltage: 250V AC/DC
3. 绝缘电阻:最小1000 MΩ
Insulation Resistance: 1000 MΩ Min
4. 耐电压:500V AC
Dielectric withstanding Voltage: 500V AC
5. 接触电阻:最大20 mΩ
Contact Resistance: 20 mΩ Max
6. 工作温度:-25°C ~ +85°C
Operating Temperature: -25°C to+85°C
7. 接触材质:黄铜
Contact Material: Brass
Plating:Sn Over Ni
8. 电镀:锡加镍底
Plating:Sn Over Ni
9. 绝缘材料:PA66UL94V-0
Insulation Material: PA66 UL94V-0
10. 标有***符号为主要尺寸
Marked *** symbol are major dimensions
11. Packing: 1000PCS/ PE Bag;
包装: 1000PCS/PE袋装

N	DIM A	DIM B
2P	2.50	7.50
3P	5.00	10.00
4P	7.50	12.50
5P	10.00	15.00
6P	12.50	17.50
7P	15.00	20.00
8P	17.50	22.50
9P	20.00	25.00
10P	22.50	27.50
11P	25.00	30.00
12P	27.50	32.50
13P	30.00	35.00
14P	32.50	37.50

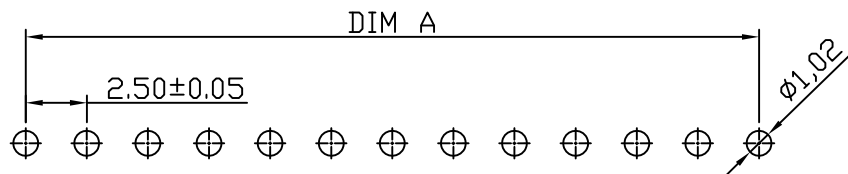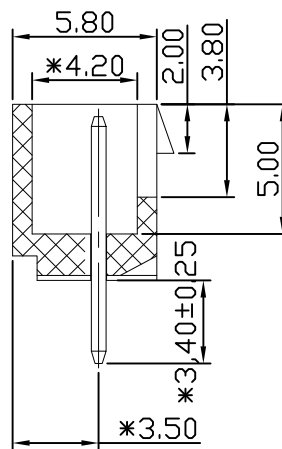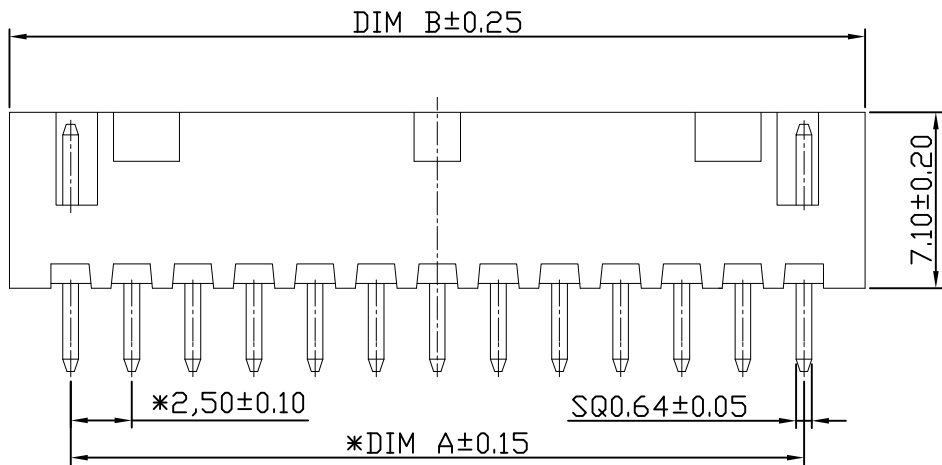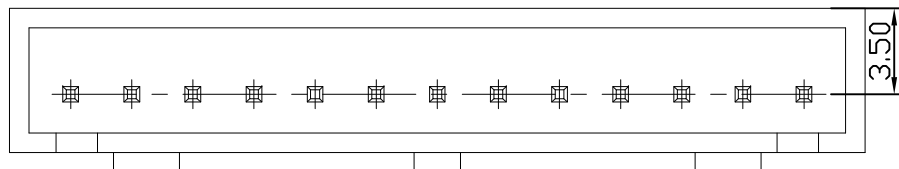

P.C.B LAYOUT

Ordering Information

LA2512 XX X XXXX

NO.of Pins Per Row: 01-99P
 Packing: A:PE Bag 袋装, B:Tube 管装, C:Tray 盘装, D:Reel 卷装, E:Bag and Box 袋加盒, F:Other其他
 Serial NO.: 0001-9999

LD CONN 东莞连大精密制品有限公司
 連大 DongGuan LianDa Precision Products Co., LTD

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

TITLE	WF-Z PH2.5 1X8P 180° 带扣 贝吉色	DRAWN BY	KJL	09/19-'23
PART NO.	LA251208A0001	CHECKED BY		
DRAWING NO.	—	APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4