

HSF RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	07/06-'23	Steven

规范
Specifications






- 额定电流:2.0安培
Current Rating: 2.0Amps
- 额定电压:220V AC/DC
rated voltage: 220V AC/DC
- 绝缘电阻:最小 1000 MΩ
Insulation Resistance: 1000 MΩ Min
- 耐电压:500V AC
Dielectric withstanding Voltage: 500V AC
- 接触电阻:最大 20 mΩ
Contact Resistance: 20 mΩ Max
- 工作温度:-25°C ~ +85°C
Operating Temperature: -25°C to +85°C
- 接触材质:黄铜
Contact Material: Brass
- 电镀:锡加镍底
Plating:Sn Over Ni
- 绝缘材料: PA66 UL94V-0
Insulation Material: PA66,UL94V-0
- 标有“*”符号为主要尺寸
Marked “*” symbol are major dimensions

PIN	Dimensions	
	DIM A	DIM B
2P	2.00	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00

Ordering Information

LA2008 XX X XXXX

NO. of Pins Per Row: 01-99P
 Packing:
 A:袋装
 B:管装
 C:盘装
 D:卷装
 E:袋加盒
 F:其它
 Serial NO. 0001-9999

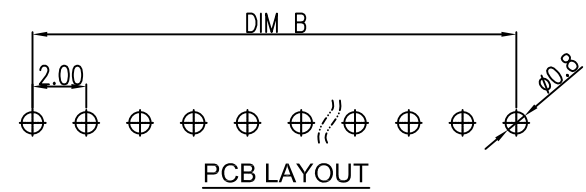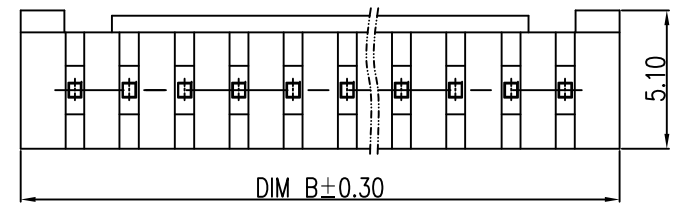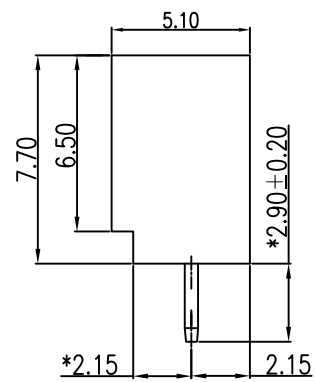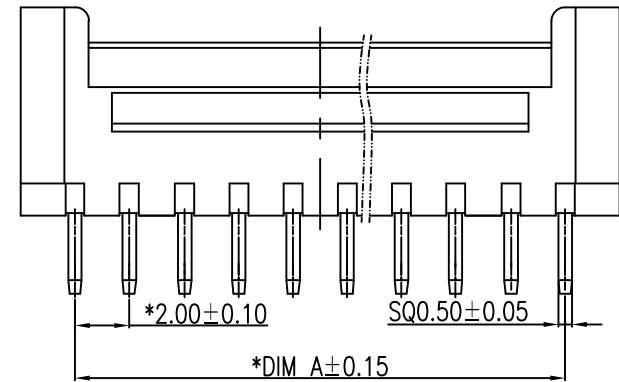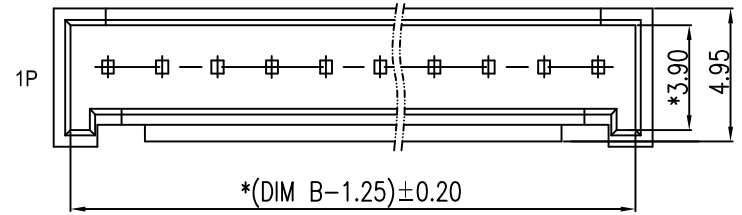

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

LDCONN 东莞连大精密制品有限公司
 連大 DongGuan LianDa Precision Products Co., LTD

TITLE	WF-Z PH2.0 1X6P 180°带扣 贝吉色	DRAWN BY	Steven	07/06-'23
PART NO.	LA200806A0010	CHECKED BY		
DRAWING NO.		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4