
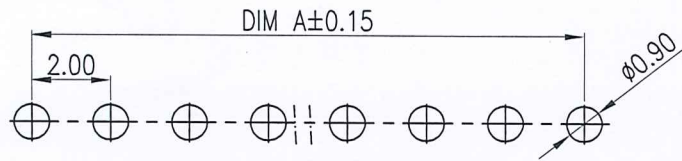
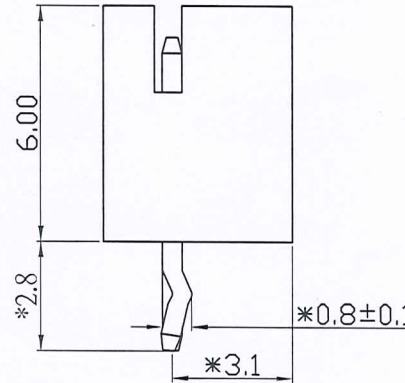
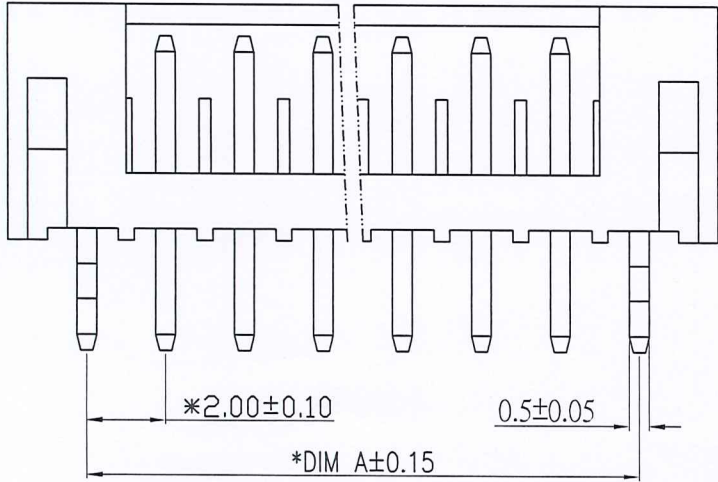


**HSF RoHS**

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	10/20-'18	YTT
B	—	旧料号: L10404-105105A	03/02-'24	KJL

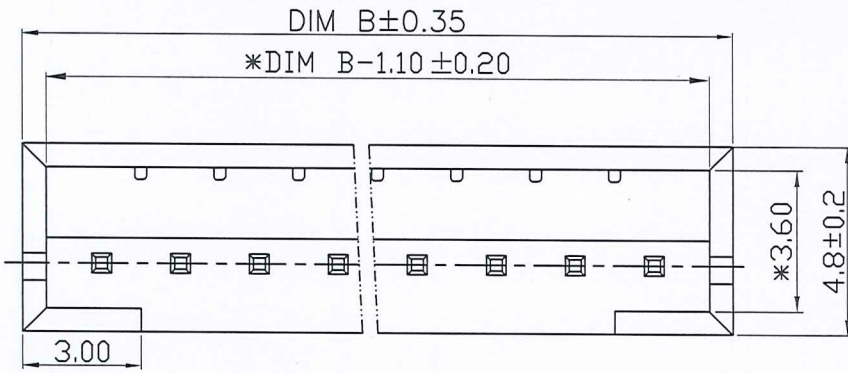

PCB LAYOUT

**Specifications**

- 规范
- Current Rating: 2.0Amps  
额定电流: 2.0安培
  - rated voltage: 220V AC/DC  
额定电压: 220V AC/DC
  - Insulation Resistance: 1000 MΩ Min  
绝缘电阻: 1000 MΩ最小
  - Dielectric withstanding Voltage: 500V AC  
耐电压: 500V AC
  - Contact Resistance: 20 mΩ Max  
接触电阻: 20 mΩ最大
  - Operating Temperature: -25°C to +85°C  
工作温度: -25°C to +85°C
  - Contact Material: Brass  
接触材质: 黄铜
  - Plating: Sn 80u" Over Ni 30u"~60u"  
电镀: 镀锡 80u"加镍底 30u"~60u"
  - Insulation Material: PA66, UL94V-0  
绝缘材料: PA66, UL94V-0
  - Marked "\*" symbol are major dimensions  
标有 "\*" 符号为主要尺寸
  - Packing: 1000PCS/PE bag;  
包装: 1000PCS/PE袋装;

PIN	Dimensions	
	DIM A	DIM B
2P	2.00	6.05
3P	4.00	8.05
4P	6.00	10.05
5P	8.00	12.05
6P	10.00	14.05
7P	12.00	16.05
8P	14.00	18.05
9P	16.00	20.05
10P	18.00	22.05
11P	20.00	24.05
12P	22.00	26.05
13P	24.00	28.05
14P	26.00	30.05
15P	28.00	32.05
16P	30.00	34.05

**Ordering Information**

LA2001 XX X XXXX

NO. of Pins Per Row: 01-99P  
Packing: A:袋装 B:管装 C:盘装 D:卷装 E:袋加盒 F:其它  
Serial NO. 0001-9999



TOLERANCE UNLESS OTHERWISE SPECIFIED	
LINER	ANGLES
.0 ± 0.30	0.° ± 3°
.00 ± 0.20	.0° ± 2°
.000 ± 0.10	.00° ± 1°

**LDCONN** 东莞连大精密制品有限公司  
DongGuan LianDa Precision Products Co., LTD

TITLE	WAFER-Z PH2.0 1X4P 180° 打K点,蓝色	DRAWN BY	YTT	10/20-'18
PART NO.	LA200104A0003	CHECKED BY	YS	3/9-24
DRAWING NO.	—	APPROVED BY	ZX	3/9-24
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4