
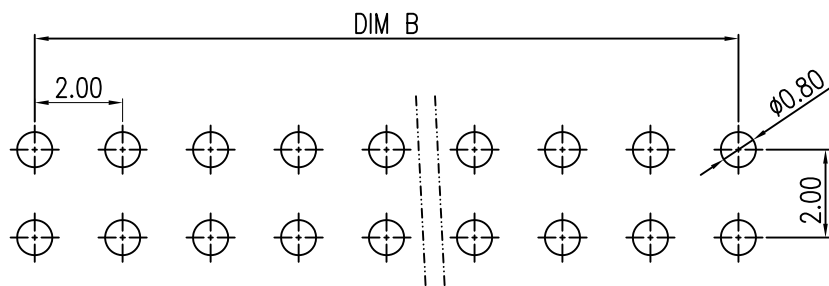
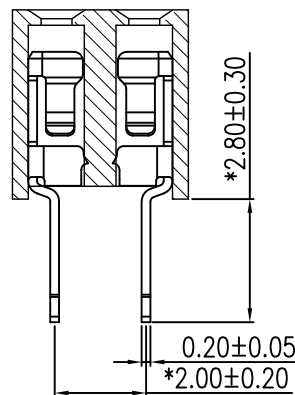
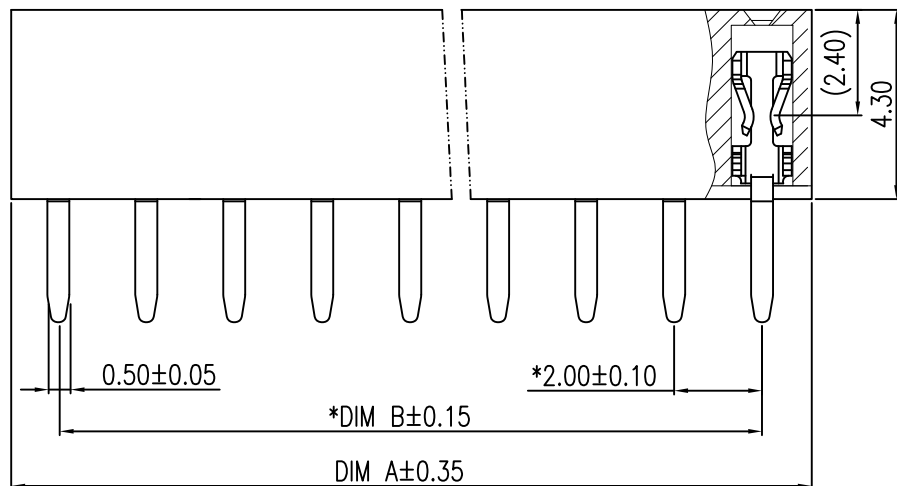


HSF RoHS

非正式图纸, 仅供参考

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	06/08-'22	Steven

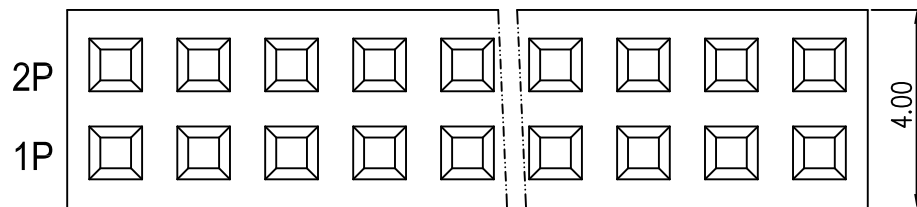

PCB LAYOUT

规范

Specifications

- 额定电流: 2.0安培
Current Rating: 2.0Amps
- 额定电压: 220V AC/DC
rated voltage: 220V AC/DC
- 绝缘电阻: 1000 MΩ最小
Insulation Resistance: 1000 MΩ Min
- 耐电压: 500V AC
Dielectric withstanding Voltage: 500V AC
- 接触电阻: 20 mΩ最大
Contact Resistance: 20 mΩ Max
- 工作温度: -40°C ~ +105°C
Operating Temperature: -40°C to +105°C
- 接触材质: 磷铜
Contact Material: phosphor Bronze
- 电镀: 金 G/F 加镍底
Plating: Au G/F Over Ni
- 绝缘材料: PA6T, UL94V-0, 黑色
Insulation Material: PA6T, UL94V-0, Black
- 标有“*”符号为主要尺
Marked “*” symbol are major dimensions
- 包装: 盘装;
Packing: Tray;

Ordering Information

LFH 200 X XX X XXXX

Pitch 200=2.00	排数 1: 单排 2: 双排 3: 三排 4: 四排	PIN Number 1~99 (单排的PIN数)	Packing A: 袋装 B: 管装 C: 盘装 D: 卷装 E: 袋加盒 F: 其它	Serial No 0001~9999
-------------------	--	---------------------------------	--	------------------------

PIN	DIM A	DIM B
2x1P	2.50	
2x2P	4.50	2.00
2x3P	6.50	4.00
2x4P	8.50	6.00
2x5P	10.50	8.00
2x6P	12.50	10.00
2x7P	14.50	12.00
2x8P	16.50	14.00
2x9P	18.50	16.00
2x10P	20.50	18.00
2x11P	22.50	20.00
2x12P	24.50	22.00
2x13P	26.50	24.00
2x14P	28.50	26.00
2x15P	30.50	28.00
2x16P	32.50	30.00
2x17P	34.50	32.00
2x18P	36.50	34.00
2x19P	38.50	36.00
2x20P	40.50	38.00
2x21P	42.50	40.00
2x22P	44.50	42.00
2x23P	46.50	44.00
2x24P	48.50	46.00
2x25P	50.50	48.00
2x26P	52.50	50.00
2x27P	54.50	52.00
2x28P	56.50	54.00
2x29P	58.50	56.00
2x30P	60.50	58.00
2x31P	62.50	60.00
2x32P	64.50	62.00
2x33P	66.50	64.00
2x34P	68.50	66.00
2x35P	70.50	68.00
2x36P	72.50	70.00
2x37P	74.50	72.00
2x38P	76.50	74.00
2x39P	78.50	76.00
2x40P	80.50	78.00

LDCONN 东莞连大精密制品有限公司
DongGuan LianDa Precision Products Co., LTD

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

TITLE	PH2.0X4.3 2X6P 180°排母 O型	DRAWN BY	Steven	06/08-'22
PART NO.	LFH200206C0006	CHECKED BY		
DRAWING NO.		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4