

**HSF** RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	09/12-'18	ZSL
B	—	旧料号: L20620-0613005A	02/19-'22	FS

Specifications





- 规范
- Current Rating: 2.0Amps  
额定电流: 2.0安培
  - rated voltage: 220V AC/DC  
额定电压: 220V AC/DC
  - Insulation Resistance: 1000 MΩ Min  
绝缘电阻: 最小1000 MΩ
  - Dielectric withstanding Voltage: 500V AC  
耐电压: 500V AC
  - Contact Resistance: 20 mΩ Max  
接触电阻: 最大20 mΩ
  - Operating Temperature: -40° C to +105° C  
工作温度: -40° C ~ +105° C
  - Contact Material: Brass  
接触材质: 黄铜
  - Plating: Au G/F  
电镀: 金 G/F
  - Insulation Material: PA6T, UL94V-0  
绝缘材料: PA6T, UL94V-0
  - Marked "\*" symbol are major dimensions  
标有 "\*" 符号为主要尺寸
  - Packing: PE bag;  
包装: PE袋;

PIN	DIM A	DIM B
2x1P	1.80	2.00
2x2P	3.80	2.00
2x3P	5.80	4.00
2x4P	7.80	6.00
2x5P	9.80	8.00
2x6P	11.80	10.00
2x7P	13.80	12.00
2x8P	15.80	14.00
2x9P	17.80	16.00
2x10P	19.80	18.00
2x11P	21.80	20.00
2x12P	23.80	22.00
2x13P	25.80	24.00
2x14P	27.80	26.00
2x15P	29.80	28.00
2x16P	31.80	30.00
2x17P	33.80	32.00
2x18P	35.80	34.00
2x19P	37.80	36.00
2x20P	39.80	38.00
2x21P	41.80	40.00
2x22P	43.80	42.00
2x23P	45.80	44.00
2x24P	47.80	46.00
2x25P	49.80	48.00
2x26P	51.80	50.00
2x27P	53.80	52.00
2x28P	55.80	54.00
2x29P	57.80	56.00
2x30P	59.80	58.00
2x31P	61.80	60.00
2x32P	63.80	62.00
2x33P	65.80	64.00
2x34P	67.80	66.00
2x35P	69.80	68.00
2x36P	71.80	70.00
2x37P	73.80	72.00
2x38P	75.80	74.00
2x39P	77.80	76.00
2x40P	80.00	78.00

Ordering Information

LPH 200 X XX X XXXX

Pitch 200=2.00  
 Rows 1: 单排  
 2: 双排  
 3: 三排  
 4: 四排  
 PIN Number 1~99 (单排的PIN数)  
 Packing A: 袋装  
 B: 管装  
 C: 盘装  
 D: 卷装  
 E: 袋加盘  
 F: 其它  
 Serial No 0001~9999

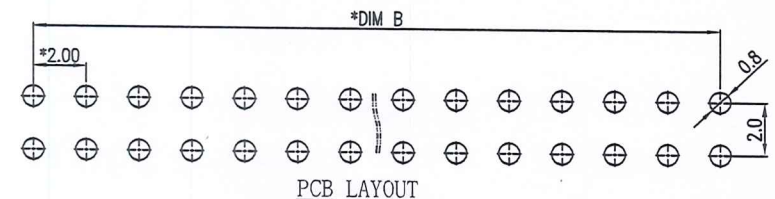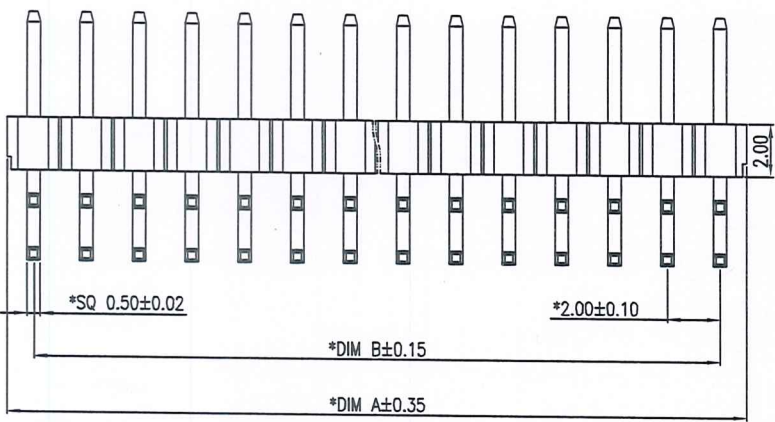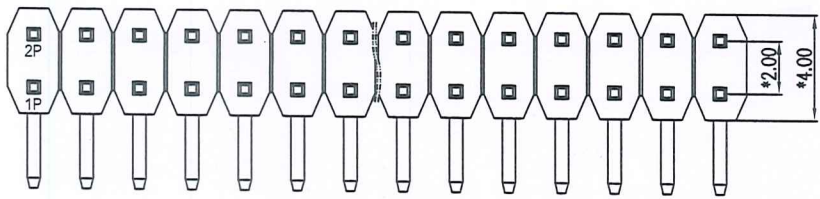

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

LDCONN 东莞连大精密制品有限公司 DongGuan LianDa Precision Products Co., LTD				
TITLE	PH2.0X2.0 2X6P 90° 双排 单塑排针	DRAWN BY	ZSL	09/12-'18
PART NO.	LPH200206A0052	CHECKED BY	ZL	6/1-24
DRAWING NO.	—	APPROVED BY	ZX	6/3-24
SCALE	1:1	UNIT	mm	PAGE 1/1
		SIZE	A4	