

HSF RoHS





REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	09/07-'24	KJL

规范

Specifications

- 额定电流:3.0安培
Current Rating: 3.0Amps
- 额定电压:250V AC/DC
rated voltage: 250V AC/DC
- 绝缘电阻:最小1000 MΩ
Insulation Resistance: 1000 MΩ Min
- 耐电压:500V AC
Dielectric withstanding Voltage: 500V AC
- 接触电阻:最大20 mΩ
Contact Resistance: 20 mΩ Max
- 工作温度:-40°C ~ +105°C
Operating Temperature: -40°C to+105°C
- 接触材质:黄铜
Contact Material: Brass
- 电镀:锡加镍底
Plating:Sn Over Ni
- 绝缘材料:PA66,UL94V-0
Insulation Material: PA66,UL94V-0
- 标有“*”符号为主要尺寸
Marked “*” symbol are major dimensions
- Packing: 1000PCS/Bag
包装: 1000PCS/袋

PIN	尺寸 (mm)		
	A	B	C
2P	2.54	5.08	2.25
3P	5.08	7.62	4.79
4P	7.62	10.16	7.33
5P	10.16	12.70	9.87
6P	12.70	15.24	12.41
7P	15.24	17.78	14.95
8P	17.78	20.32	17.49
9P	20.32	22.86	20.03
10P	22.86	25.40	22.57
11P	25.40	27.94	25.11
12P	27.94	30.48	27.65
13P	30.48	33.02	30.19
14P	33.02	35.56	32.73
15P	35.56	38.10	35.27
16P	38.10	40.64	37.81
17P	40.64	43.18	40.35
18P	43.18	45.72	42.89
19P	45.72	48.26	45.43
20P	48.26	50.80	47.97

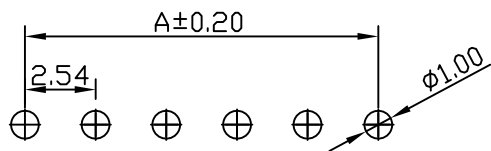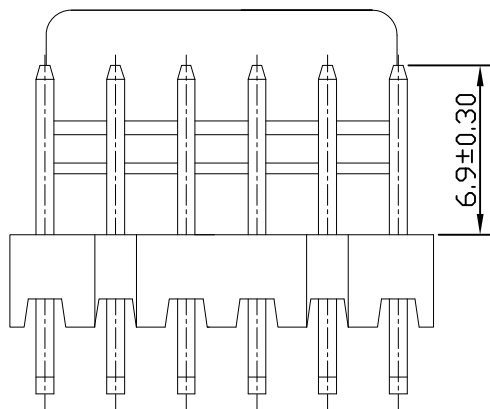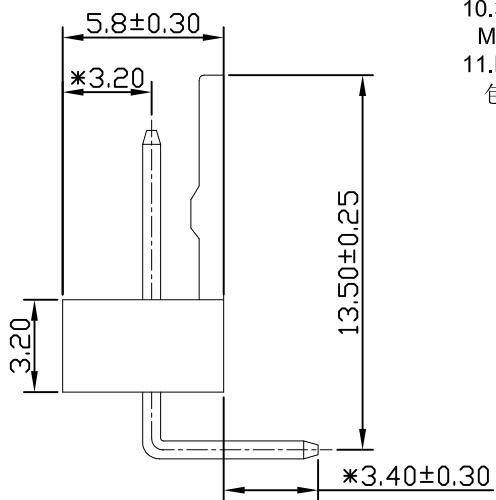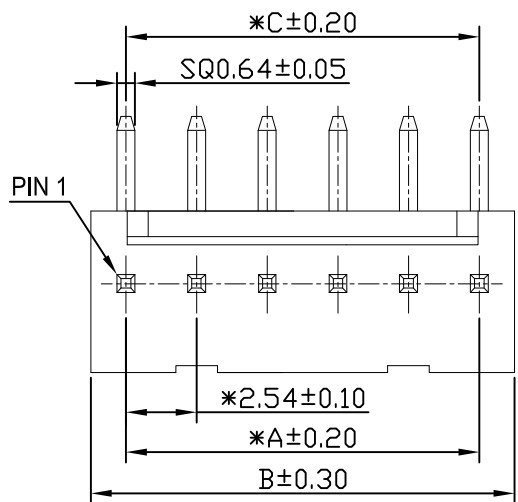

PCB LAYOUT

Ordering Information

LA2543 XX X XXXX

NO.of Pins Per Row: 01-99P
 Packing: A:袋装, B:管装, C:盘装, D:卷装, E:袋加盒, F:其它
 Serial NO. 0001-9999

LDCONN 东莞连大精密制品有限公司
 連大 DongGuan LianDa Precision Products Co., LTD

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

TITLE	WF-W PH2.54 14P 90° 直背高弯 (贝吉色)	DRAWN BY	KJL	09/07-'24
PART NO.	LA254314A0001	CHECKED BY		
DRAWING NO.	—	APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/2
				SIZE A4