
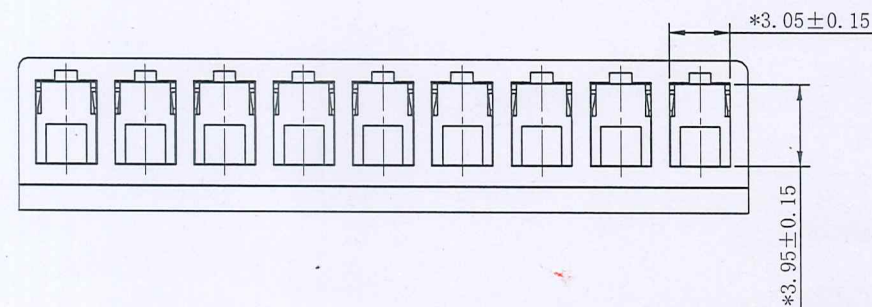
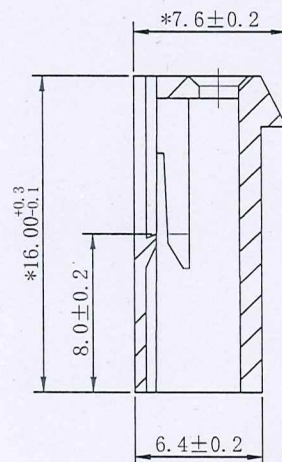
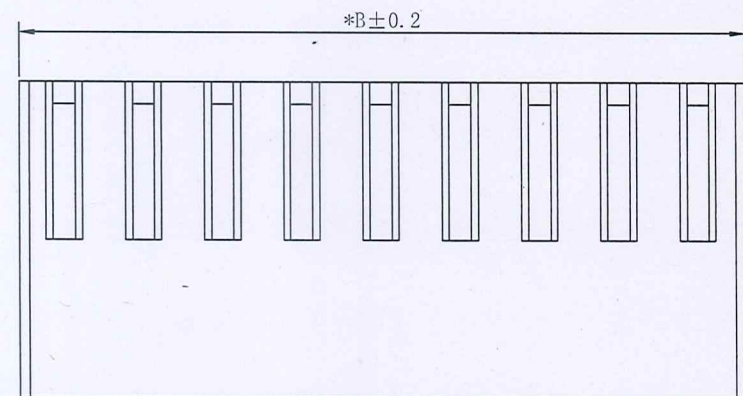


REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW	08/30-'24	WL

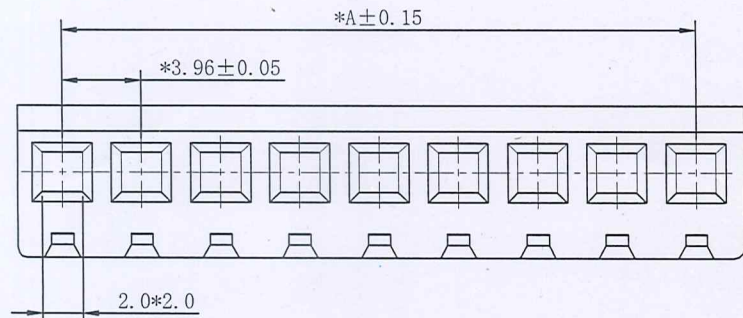

产品性能:

1. 塑胶材质: PA66 UL94V-0
2. 额定电压: 250V AC/DC
3. 耐压值: 1500AC/minute
4. 绝缘电阻: $\geq 100M\Omega$
5. 使用温度: $-25^{\circ}C \sim +85^{\circ}C$

品质要求:

- 1、产品不能有缺胶、严重缩水、烧焦、PIN孔堵塞、混料等不良;
- 2、毛边最大不能超过0.05mm;
- 3、标有*为重点检测尺寸;

PART NO	Dimensions	
	A	B
ZL3961-Y-2P	3.96	8.45
ZL3961-Y-3P	7.92	12.40
ZL3961-Y-4P	11.88	16.35
ZL3961-Y-5P	15.84	20.35
ZL3961-Y-6P	19.80	24.20
ZL3961-Y-7P	23.76	28.45
ZL3961-Y-8P	27.72	32.20
ZL3961-Y-9P	31.68	36.25
ZL3961-Y-10P	35.64	40.30
ZL3961-Y-11P	39.60	44.25
ZL3961-Y-12P	43.56	48.25
ZL3961-Y-13P	47.52	52.20
ZL3961-Y-14P	51.48	56.15
ZL3961-Y-15P	55.44	60.10
ZL3961-Y-16P	59.40	64.10



LDCONN 东莞连大精密制品有限公司
DongGuan LianDa Precision Products Co., LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

TITLE	WF-ZL CH3.96 1x5P 透明胶壳	DRAWN BY	WL	08/30-'24
PART NO.	2HCB39605201	CHECKED BY	WSS	8/30-24
DRAWING NO.		APPROVED BY	ZX	8/30-24
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4

rd04