
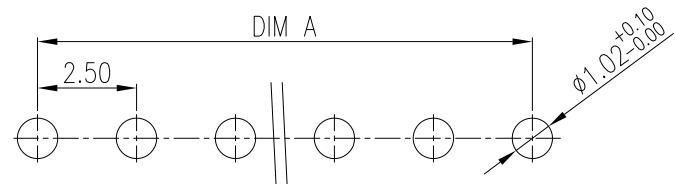
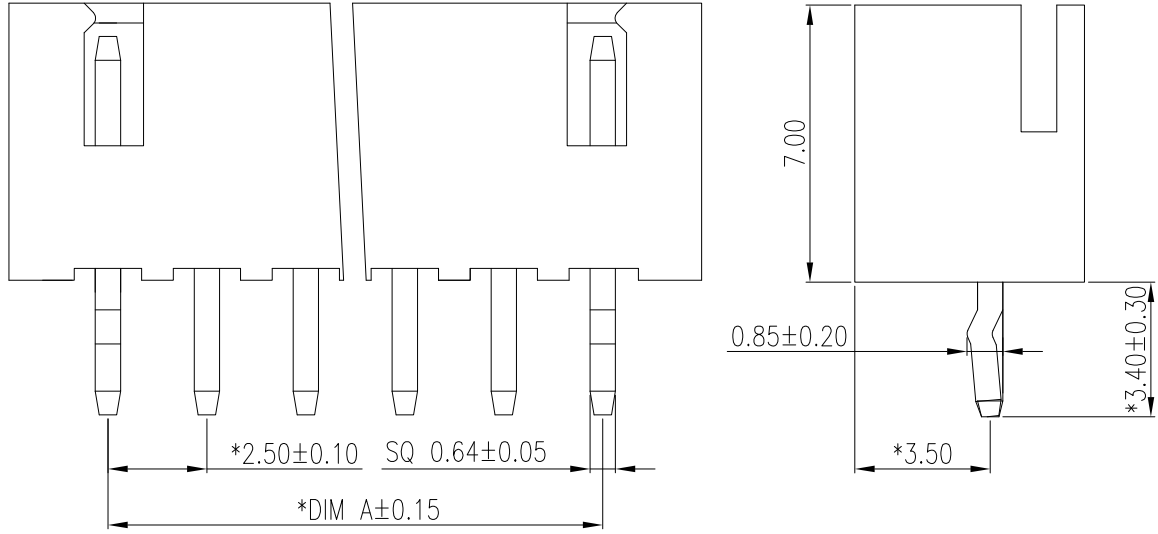


**HSF RoHS**

PART NO	DIM A	DIM B
2P	2.5	7.5
3P	5.0	10.0
4P	7.5	12.5
5P	10.0	15.0
6P	12.5	17.5
7P	15.0	20.0
8P	17.5	22.5
9P	20.0	25.0
10P	22.5	27.5
11P	25.0	30.0
12P	27.5	32.5
13P	30.0	35.0
14P	32.5	37.5

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	11/01-17	YTT
B	—	旧料号: L10504-105103A	01/08-22	KJL

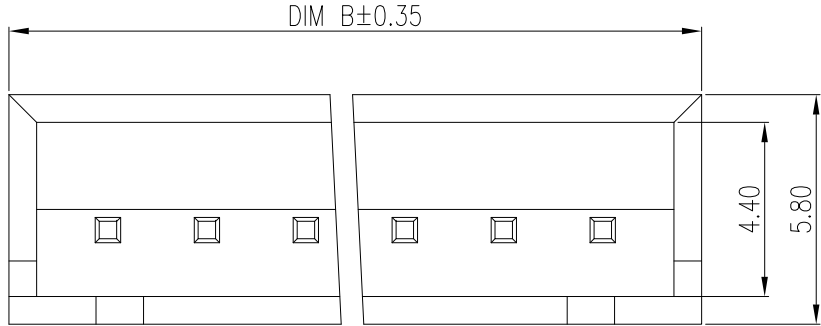

**PCB LAYOUT**

**规范**

**Specifications**

- 额定电流:3.0安培  
Current Rating: 3.0Amps
- 额定电压:250V AC/DC  
rated voltage: 250V AC/DC
- 绝缘电阻:最小1000 MΩ  
Insulation Resistance: 1000 MΩ Min
- 耐电压:1000V AC  
Dielectric withstanding Voltage: 1000V AC
- 接触电阻:最大20 mΩ  
Contact Resistance: 20 mΩ Max
- 工作温度:-40°C ~ +105°C  
Operating Temperature: -40°C to +105°C
- 接触材质:黄铜  
Contact Material: Brass
- 电镀:锡加镍底  
Plating: Sn Over Ni
- 绝缘材料:PA66,UL94V-0  
Insulation Material: PA66,UL94V-0
- 标有\*\*符号为主要尺寸  
Marked \*\* symbol are major dimensions
- 包装: 1000PCS/PE袋  
Packing: 1000PCS/PE bag

**Ordering Information**

LA2501 XX X XXXX

NO. of Pins Per Row: 01-99P	Packing A:袋装 B:管装 C:盘装 D:卷装 E:袋加盒 F:其它	Serial NO. 0001-9999
-----------------------------------	--	-------------------------

**LDCONN 东莞连大精密制品有限公司**  
DongGuan LianDa Precision Products Co., LTD

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

TITLE	WF-Z PH2.5 4P 180°打K点 贝吉色	DRAWN BY	YTT	11/01-17				
PART NO.	LA250104A0004	CHECKED BY						
DRAWING NO.		APPROVED BY						
SCALE	1:1	UNIT	mm		PAGE	1/1	SIZE	A4