
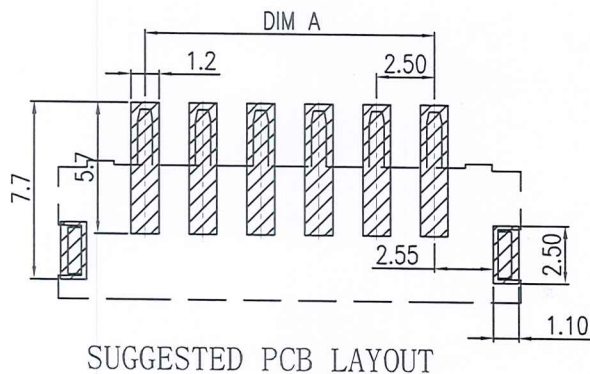
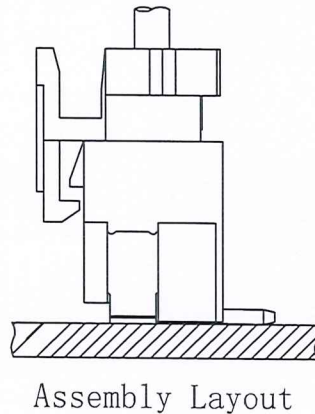
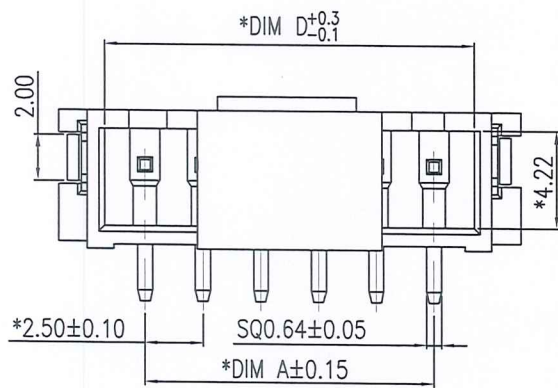



HSF RoHS

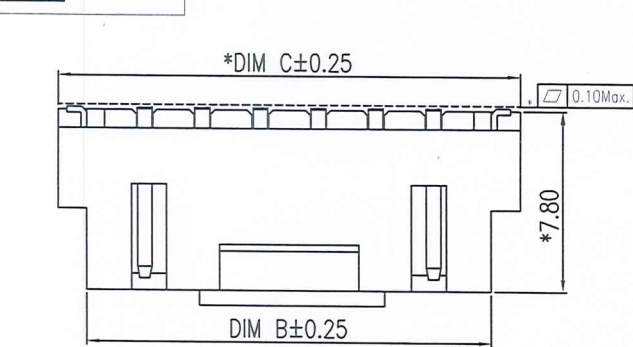

规范
Specifications

1. 额定电流:3安培
Current Rating: 3 Amps
2. 额定电压: 250V AC/DC
rated voltage: 250V AC/DC
3. 绝缘电阻:最小1000 MΩ
Insulation Resistance: 1000 MΩ Min
4. 耐电压:500V AC
Dielectric withstanding Voltage: 500V AC
5. 接触电阻:最大20 mΩ
Contact Resistance: 20 mΩ Max
6. 工作温度:-25°C ~ +85°C
Operating Temperature: -25°C to+85°C
7. 接触材质:磷铜,镀锡
Contact Material: Phosphor Bronze ,Plating Sn
8. 接地片:黄铜, 镀锡
Positioning pin:Brass,Plating Sn
9. 绝缘材料:LCP,UL94V-0
Insulation Material: LCP,UL94V-0
10. 标有"***"符号为主要尺寸
Marked "***" symbol are major dimensions

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	01/16-22	LZM
B	—	变更料号:L2502AWV-**-F1CA-R-X	11/18-20	KJL
C	—	旧料号LA2502-0285S2801D	03/19-24	LJS

N	DIM A	DIM B	DIM C	DIM D	MPQ
2P	2.50	7.50	10.00	6.00	500PCS/卷
3P	5.00	10.00	12.50	8.50	500PCS/卷
4P	7.50	12.50	15.00	11.00	500PCS/卷
5P	10.00	15.00	17.50	13.50	500PCS/卷
6P	12.50	17.50	20.00	16.00	500PCS/卷
7P	15.00	20.00	22.50	18.50	500PCS/卷
8P	17.50	22.50	25.00	21.00	500PCS/卷
9P	20.00	25.00	27.50	23.50	500PCS/卷
10P	22.50	27.50	30.00	26.00	500PCS/卷
11P	25.00	30.00	32.50	28.50	500PCS/卷
12P	27.50	32.50	35.00	31.00	500PCS/卷
13P	30.00	35.00	37.50	33.50	500PCS/卷
14P	32.50	37.50	40.00	36.00	500PCS/卷
15P	35.50	40.00	42.50	38.50	500PCS/卷
16P	37.50	42.50	45.00	41.00	500PCS/卷

Ordering Information
LA2501 XX X XXXX

NO.of Pins Per Row: 01-99P
Packing A:袋装 B:管装 C:盘装 D:卷装 E:袋加盒 F:其它
Serial NO. 0001-9999



LDCONN 东莞连大精密制品有限公司
DongGuan LianDa Precision Products Co., LTD

STANDARD TOLERANCE (EXCEPT SPECIFIED)		TITLE	DRAWN BY	LZM	11/23-19
LINER	ANGLES	WF-J PH2.5 2P 立贴 带扣带帽, 贝吉色			
.0 ±0.30	0.° ±3°	PART NO. LA250102D0010	CHECKED BY	KJL	4/14-24
.00 ±0.20	.0° ±2°	DRAWING NO.	APPROVED BY	ZX	4/15-24
.000 ±0.10	.00° ±1°	SCALE 1:1	UNIT mm	PAGE 1/1	SIZE A4