
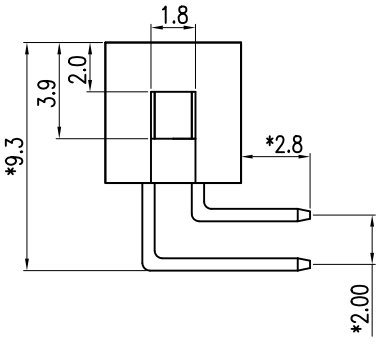
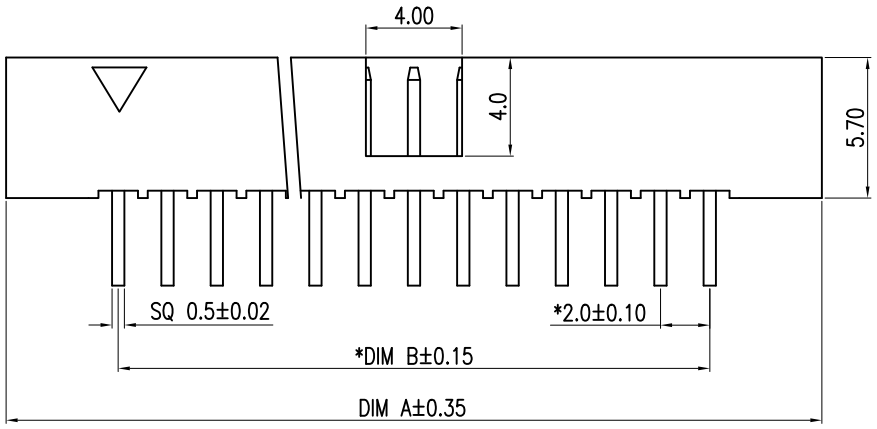


REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	07/03-'24	Steven

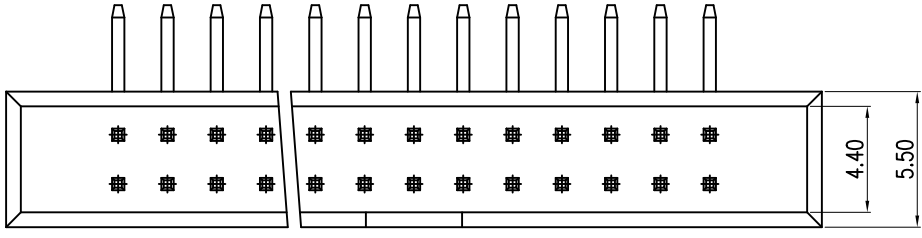


- Specifications**
 规范
 1. Current Rating: 2.0Amps
 额定电流: 2.0安培
 2. rated voltage: 220V AC/DC
 额定电压: 220V AC/DC
 3. Insulation Resistance: 1000 MΩ Min
 绝缘电阻: 最小1000 MΩ
 4. Dielectric withstanding Voltage: 500V AC
 耐电压: 500V AC
 5. Contact Resistance: 20 mΩ Max
 接触电阻: 最大20 mΩ
 6. Operating Temperature: -40°C to +105°C
 工作温度: -40°C ~ +105°C
 7. Contact Material: Brass
 接触材质: 黄铜
 8. Plating: Au G/F Over Ni
 电镀: 金 G/F 加镍底
 9. Insulation Material: PA6T, UL94V-0, Black
 绝缘材料: PA6T, UL94V-0, 黑色
 10. Marked "*" symbol are major dimensions
 标有 "*" 符号为主要尺寸
 11. Packing: Tray;
 包装: 盘装;

PIN	DIM A	DIM B
2x2P	11.30	2.00
2x3P	13.30	4.00
2x4P	15.30	6.00
2x5P	17.30	8.00
2x6P	19.30	10.00
2x7P	21.30	12.00
2x8P	23.30	14.00
2x9P	25.30	16.00
2x10P	27.30	18.00
2x11P	29.30	20.00
2x12P	31.30	22.00
2x13P	33.30	24.00
2x14P	35.30	26.00
2x15P	37.30	28.00
2x16P	39.30	30.00
2x17P	41.30	32.00
2x18P	43.30	34.00
2x19P	45.30	36.00
2x20P	47.30	38.00
2x21P	49.30	40.00
2x22P	51.30	42.00
2x23P	53.30	44.00
2x24P	55.30	46.00
2x25P	57.30	48.00
2x26P	59.30	50.00
2x27P	61.30	52.00
2x28P	63.30	54.00
2x29P	65.30	56.00
2x30P	67.30	58.00
2x31P	69.30	60.00
2x32P	71.30	62.00
2x33P	73.30	64.00
2x34P	75.30	66.00
2x35P	77.30	68.00
2x36P	79.30	70.00
2x37P	81.30	72.00
2x38P	83.30	74.00
2x39P	85.30	76.00
2x40P	87.30	78.00

Ordering Information
LBH 200 X XX X XXXX

Code	Pitch	Rows	PIN Number	Packing	Serial No
PH: PIN HEADER 排针	100: 1.0	1: 1Row单排	PIN数	A: PE Bag 袋装	0001~9999
FH: FEMALE HEADER 排母	127: 1.27	2: 2Row双排	1~99	B: Tube 管装	
BH: EJECTOR HEADER 筒牛	200: 2.0	3: 3Row三排 (Per Row每排)		C: Tray 盘装	
EH: BOX HEADER 牛角	250: 2.5	4: 4Row四排		D: Reel 卷装	
	254: 2.54			E: Bag and Box 袋加盒	
				F: Other 其他	

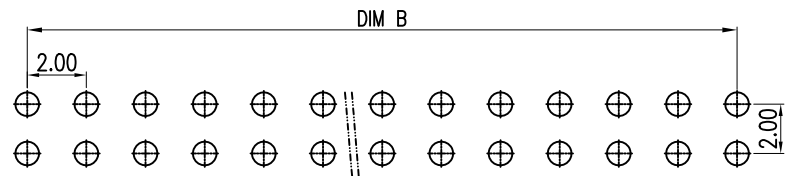

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

LD CONN 东莞连大精密制品有限公司
 连大 DongGuan LianDa Precision Products Co., LTD

TITLE	PH2.0X5.7 2X7P 90° 双排筒牛 侧面开窗	DRAWN BY	Steven	07/03-'24
PART NO	LBH200207C0005	CHECKED BY		
DRAWING NO	—	APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4